



Worksaver HYDRAULIC POST DRIVERS

- Front Farm Tractor Mount
- Front Skid Steer Loader Mount

HPD-24 SHC


Is a model 24-driver with a 3 pt. hitch hydraulic controlled center mount. A two-spool valve provides easy positive control of the two-ram positioning cylinders. Adjustable stabilizer legs are standard.

HPD-24 SWO

Is a model 24-driver with a 3 pt. hitch hydraulic controlled offset mount. The driver ram is offset to the left rear corner of the tractor and can be hydraulically extended 24 inches. The driver ram can also be turned 90° so the driver can install a post anywhere along the fence line. The tractor can be driven along side the fence and at the same time pull a trailer of posts. The SWO mount has a fixed leg and a base support.

HPD-24 HSS

Is designed for the larger size skid-steer loaders. Skid-steer loaders provide a smaller size power unit that can get into tight places a farm tractor may not be able to navigate. They are easier to transport and with their tilt cylinders, allow a greater range of front to rear angle adjustment. The model HPD 24 HSS is also equipped with adjustable stabilizer legs for a solid footing when driving a post.

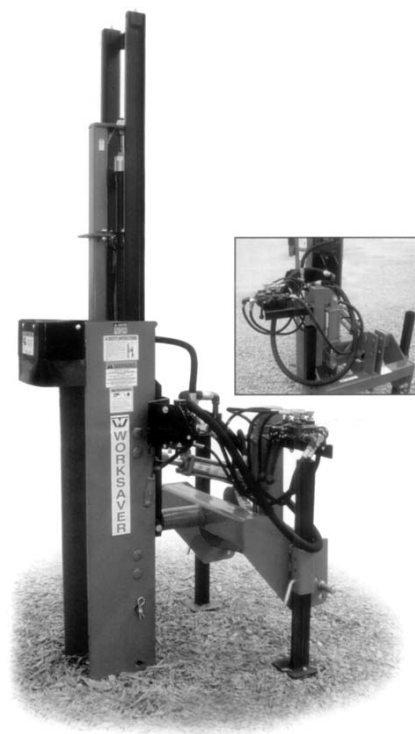

Post Driver Specifications	HPD-24 HSS	HPD-24 SHC	HPD-24 SWO
Maximum Post Size	11" x 10'	11" x 10"	11" x 10'
Impact at Full Stroke	110 000 lbs	110 000 lbs	110 000 lbs
Minimum Tractor Size	35 HP	45 PTO HP	45 PTO HP
Minimum Hydraulic Requirements	12 gpm	12 gpm	12 gpm
Hydraulic Tilt Adjustment:			
• Front / Back	17° each way	17° each way	17° each way
• Side / Side	20° each way	20° each way	20° each way
• Valve	2 - spool valve	2 - spool valve	3 - spool valve
• Cylinder No. & Size	(2) 3" x 6"	(2) 3" x 6"	(2) 3" x 6" / (1) 2" x 24"
Tractor Hitch Size	N/A	Cat. II	Cat. II
Shipping Weight	1 250 lbs	1 116 lbs	1 669 lbs
Computer Number	814 982	814 983	814 984




AIR OPERATED POST DRIVER

Easily operated by one man, they deliver approximately 1600 blows per minute. A reciprocating piston strikes directly on the post or drive cap. The Model PD-39 has low air consumption rate, is lightweight and hand portable. Ideal for driving in places that are hard to reach. Because the PD-39 is so light in weight, the operator must pull gently down on the handle to provide additional weight to facilitate driving. The throttle valve controlling the unit is incorporated into one of the handles. All you need is enough air - 42 CFM @ 90 PSI, a filter-regulator-lubricator to assure clean air/proper pressure/ plus ten drops of oil per minute, and your Rhino Model PD-39 will give you fast, low cost driving.

Weighing less than most hand drivers, the lightweight Model PD-39 Air Operated Post Driver is easily operated by one man. Perfect for driving all types of steel fence posts. An ideal tool for the fast erection of temporary fencing. In seconds you can drive C-posts, T-posts, channel posts, telespar, delineator posts, pipe, I-posts, W-posts, round square or rectangular tubing.

POST DRIVER AND ACCESSORY SPECIFICATIONS		
Select the proper chuck adapter I.D. or shape from chuck sizing techdata (Form No. 121-1), then order the accessory using its part no.		
NO.	Model And / or Part No.	Specifications
1	PD-39 75906?	Light Weight Medium Duty Post Driver with a 3 5/8" (92mm) Master Chuck, uses 42 CFM (1.17 m ³ /min) " 90 PSI (6.5 Kg/cm ²). Approx. Wt. 39 lbs. (17.69 kg.)
2	PD-55	3" (77.9 mm) I.D. Chuck Adapter
3	PD-100	2 1/2" (62.7 mm) I.D. Chuck Adapter
4	70319	2" (52.5 mm) I.D. Chuck Adapter
5	70334	Channel Post Chuck Adapter - 3 to 4 lb. Posts
6	70337	Channel Post Chuck Adapter - 1.2 to 1.5 lb. Posts
7	70338	Channel Post Chuck Adapter - 2 to 2.75 lb. Posts
8	601128	Filter-Regulator-Lubricator (post driver protection)
9	225000	Carrier for Filter-Regulator-Lubricator
10	605006	3/4" (19 mm) Air Hose
11	606600	Air Line Coupler
12	606601	Coupler Safety Clip

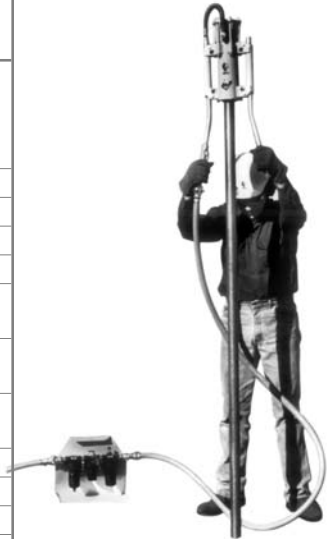


AIR OPERATED POST DRIVERS

Easily operated by one man, they deliver up to 1700 blows per minute. One moving part, a reciprocating piston, strikes directly on the Post or Drive Cap. The Drivers have low air consumption rates, are light-weight and hand portable, ideal for driving in places that are hard to reach. All you need is enough air capacity, the recommended air pressure, a Filter-Regulator-Lubricator to assure clean air, proper pressure, plus ten drops of oil per minute, and your Rhino Post Driver will give you Fast, Low Cost driving. Alloy Steel Pistons and other features insure little or no maintenance.

Four, low cost, Rhino Post Drivers let you pick the right size for your job. In seconds, you can drive Telespar, Channel Posts, C Points, Delineator Posts, Pipe, Sand Points, Ground Rods, T Posts, Anchors, Z Posts, Large Tent Pegs, I Posts, W Posts, Concrete Form Pins, Beams, Round, Square or Rectangular Tubing, Wood Posts, Stakes or any shape up to 4". Sheet Piling and Guard Rail Posts are driven with adapters.

POST DRIVER AND ACCESSORY SPECIFICATIONS		
(All Drivers are equipped with the exclusive Rhino Alloy, Double Valve Piston.)		
NO.	Model And/or Part No.	Specifications
1	PD-45 70012	Light Duty Post Driver with 3" (76.2 mm) Master Chuck. Uses 30 CFM (.83 m ³ /min.) @ 90 PSI (6.5 kg/cm ²) Approx. Wt. 46.3 lbs. (21 kg.)
2	PD-55 70013	Medium Duty Post Driver with 3-7/8" (98.4 mm) Master Chuck, uses 42 CFM (1.17 m ³ /min.) @ 90 PSI (6.5 kg/cm ²) Approx. Wt. 54.6 lbs (24.8 kg)
3	PD-100 70014	Medium/Heavy Duty Post Driver with 4-1/4" (107.9 mm) Master Chuck, uses 64 CFM (1.78m ³ /min) @ 100 PSI (7 kg/cm ²) Approx. Wt. 100.8 lbs. (45.7 kg)
4	PD-140 70014	Heavy Duty Post Driver with 4-1/4" (107.9 mm) Master Chuck, uses 64 CFM (1.78 m ³ /min.) @ 100 PSI (7kg/cm ²) Approx. Wt. 138.7 lbs. (62.9 kg)
5	600000	Throttle Valve Kit with 2' (609 mm) Hose Whip (Used with all Drivers)
6	601128	Filter-Regulator-Lubricator (Post Driver Protection)
7	225000	Carrier for Filter-Regulator-Lubricator
8	605006	3/4" (19 mm) Extra Air Hose for Valve Kit or Air Line Extensions
9	606600	Air Line Coupler
10	606601	Coupler Safety Clip
11	070061	4" x 6" (101 mm x 152 mm) H Column Chuck for PD-140
12	070062	4" x 6" (101 mm x 152 mm) H Column Driving Cap
13	070063	4" x 4" Wood Post Chuck for PD-140

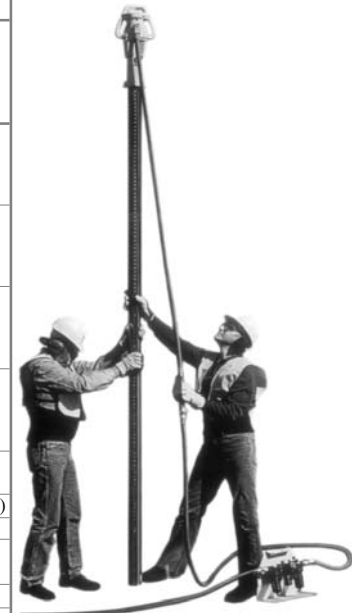

HYDRAULIC POST PULLER

A Rhino Post Puller is the low cost answer when you have to pull posts. The 53 lb. (24 kg.) hand portable model PL-3 Post Puller is easily operated by one man. Completely self-contained, its hydraulic pump produces over 3 tons of pressure to easily pull posts up to 4" x 6" (101mm x 152mm). It takes only 2 minutes to pull a post 3 ft. (.9m) deep.

A

Model PL-3 pulling a 4" x 6" (101mm x 152mm) steel guard rail post, 3ft. (.9 m) deep.

B

Model PL-3 pulling a 3/4" (19mm) ground rod, 10 ft. (3M) deep.

C

Model PL-3 pulling a standard 4" (101mm) square wood post, 3 ft. (.9m) deep.



RHINO




Worksaver

HOLE HOGS

MODEL 500

For standard duty work (Cat I/II tractors)
Auger Size: 6" to 12".

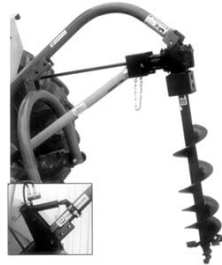

MODEL 300

For small low-profile tractors (Cat 0 tractors)
Auger Size:
30" lengths,
6", 9", 12" diameters.



MODEL 925

Industrial duty workhorse (Cat I/II tractors)
Auger Size: 6" to 30".

Hydraulically powered

Powered through a hydraulic drive motor and gearbox; eliminates shear pin replacement and slip clutch repair..



MODEL 720

For heavy-duty applications (Cat I/II tractors)
Auger Size: 6" to 24".



OTHER MODELS AVAILABLE :

MODEL 724H



MODEL 824H



MODEL 624H



WORKSAVER

CRACK FILLING SQUEEGEE



Q MODEL

A must tool for properly filling and sealing long cracks and expansion joints in pavements. Used in conjunction with a Crack Pot, model «Q» squeegee forces liquid asphalt down into the crack, pushing excess material ahead. Less material is therefore used, with none left on the pavement surface to cause "bumps". Oil resistant neoprene squeegee blade. 54" long ash handle.

BTT Q 2

Best for cracks in concrete. Swipe 2 1/2" wide

BTT Q 5

Best for cracks in asphalt. Swipe 5 1/2" wide

QB REPLACEMENT BLADE


3/8" x 2" x 20" neoprene

BTT V

Economy model

VB REPLACEMENT BLADE

1/4" x 2" x 12" neoprene

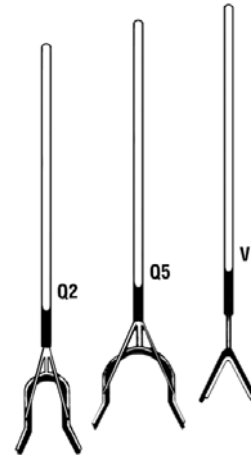

POURING POTS



A

Cone shaped fillers, furnished with three sizes of nozzles. Ground seat shut-off allows burning out without damage.



B

For low kettles. Weight 7 lbs., capacity 2 gallons.



B

With support legs.




D

For low kettles and good view to cracks. Weight 8 lbs.



E

For sheet pouring, adjustable spout for light or heavy pouring. Available with 8" or 10" spout. Weight 6 lbs., Capacity 4 gallons.

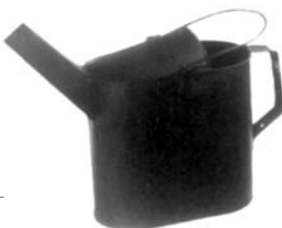

F

General carrying and pouring pot. An economical answer to the majority of pouring problems. Weight 5 1/4 lbs., capacity 3 gallons.



G

Dippers - Long handled light-weight, all welded dippers, practically indestructible.



H

Perforated sprinkler. Used with road oils, cutbacks and emulsions. Weight 6 lbs, capacity 4 gallons.



I

For sheet pouring emulsified asphalt road oils, etc. Baffled distributor instantly removable. Basket screen. Weight 6 1/2 lbs capacity 4 gallons.



J

Spreads chips, sands, gravel, slag, calcium chloride or cinders. Adjustable "Flow Control". Diameter 10 x height 15". Weight 6 1/2 lbs, capacity 1/2 cu. ft.



K

Vertical spout sheet pouring pot. Weight 6 1/2 lbs, capacity 4 1/4 gallons.

ASYBCO



ASYBCO

RATEAU LUTES




- Poignée en magnésium 1 1/4" x 7"
- *Magnesium handle 1 1/4" x 7"*
- Non conducteur de chaleur
- *Will not conduct heat*

Lames / Blades

- Disponible en 24", 30", 36"
- *Available in 24", 30", 36"*

COMPACTEUR MANUEL ASPHALT TAMP



- Moule en aluminium 6" x 8", à rebords arrondis.
- *Cast aluminum tamp 6" x 8", rounded edges.*
- Poignée de 50" en acier.
- *Steel pipe, handle 50".*

POLISSEUR SMOOTHER



- Longueur / *Length* : 10 3/4"
- Largeur / *Width* : 6 1/2"
- Épaisseur / *Thickness* : 3/4"
- Poids / *Weight* : 43 lbs

RÂTEAUX EN MAGNÉSIUM POUR ASPHALTE



SERTISSEUR HYDRAULIQUE HYDRAULIC SWAGING MACHINE

Modèle / Model: OUT-SERHY



Incluant / Including :

- 2 matrices (à sélectionner)
2 Dies (to be selected)
- 1 poussoir
1 Pusher



MATRICE / DIES

No. de Pièce / Part Number :

OUT - SERHYM

(+ dimension au choix / + Selected size)

1 1/4", 1", 3/4", 1/2", 3/8", 1/4".



POUSOIRS / PUSHERS

No. de Pièce / Part Number :

OUT-SERHYP

(+ dimension au choix / + Selected size)

1 1/4", 1", 3/4", 1/2", 3/8", 1/4".




SERTISSEUR MANUEL / SWAGE TOOL

Modèle / Model: OUT-SERMA

Incluant / Including :

- 2 matrices (à sélectionner)
2 Dies (to be selected)
- 1 poussoir
1 Pusher

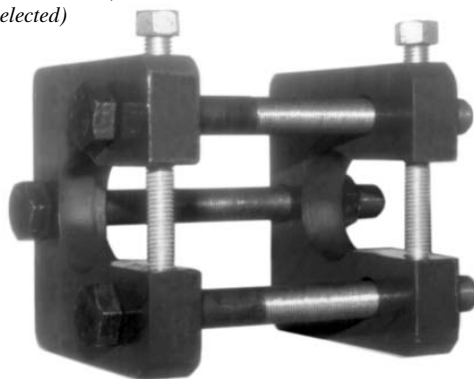

MATRICE / DIES

No. de Pièce / Part Number :

OUT - SERMAM

(+ dimension au choix / + Selected size)

1", 3/4", 1/2".



POUSOIRS / PUSHERS

No. de Pièce / Part Number :

OUT-SERMAP

(+ dimension au choix / + Selected size)

1", 3/4", 1/2".



ASYBCO



COMPRESSEUR À AIR MOBILE Rotair MOBILE AIR COMPRESSOR

70 PCM



Specifications

- High performance
- Rugged construction
- Low decibel environment

Model :	SC70
Output :	m3-min. / cfm 1.98 / 70
Operating pressure :	bar. / psi 5 - 8 / 72 - 121
Oil capacity compressor:	l / gal 4.0 / 1.1
Compressor :	2 yr. warranty Rotary screw
Drive :	Dual xpz belts
Engine :	Honda GX610K1
Cooling system :	Air
Full safety shutdowns :	Engine & compressor
Engine output :	kw / hp 12.0 / 18
Electric & manual start :	Yes Battery included
RPM range :	Aut. speed control 2200 / 3480
Oil capacity engine :	l / gal 1.8 / 0.48
Gas tank capacity :	l / gal 20 / 5.3
Lifting hooks :	Yes
Weight :	298 lbs 135 kg
Dimensions :	L x W x H 34" x 26" x 23" 86 x 66 x 59 cm

BOUILLOIRE À VAPEUR Steam-Johnny STEAM BOILER

Cette bouilloire à vapeur, alimentée au propane est utilisée dans le dégelage de drains, de tuyauterie d'égoûts, de ponceaux, de réservoirs, de bornes-fontaines et autres.

This propane gas-fired steam boiler is used for thawing drains, sewer pipes, road culverts, tanks, hydrants and others.


CARACTÉRISTIQUES SPECIFICATIONS

- Facile d'utilisation *Simple to use*
- Alimentation au propane *Propane fired*
- Pression max. 115 PSI 1b/po² *Max pressure: 115 PSI 1b/po²*
- Poids 110 lbs *Weight: 110 lbs*
- Huit minutes d'attente avant opération.
Takes 8 minutes to produce a full head of steam.
- Permet l'utilisation jusqu'à 300 pieds de boyau.
High pressure allows use of up to 300 feet of hose.

Dimensions

Longueur / Length	35"
Largueur / Width	14 1/2"
Hauteur / Height	20"

Pompe manuelle d'alimentation en eau.
Has its own hand pump to replenish water in the pressure vessel.

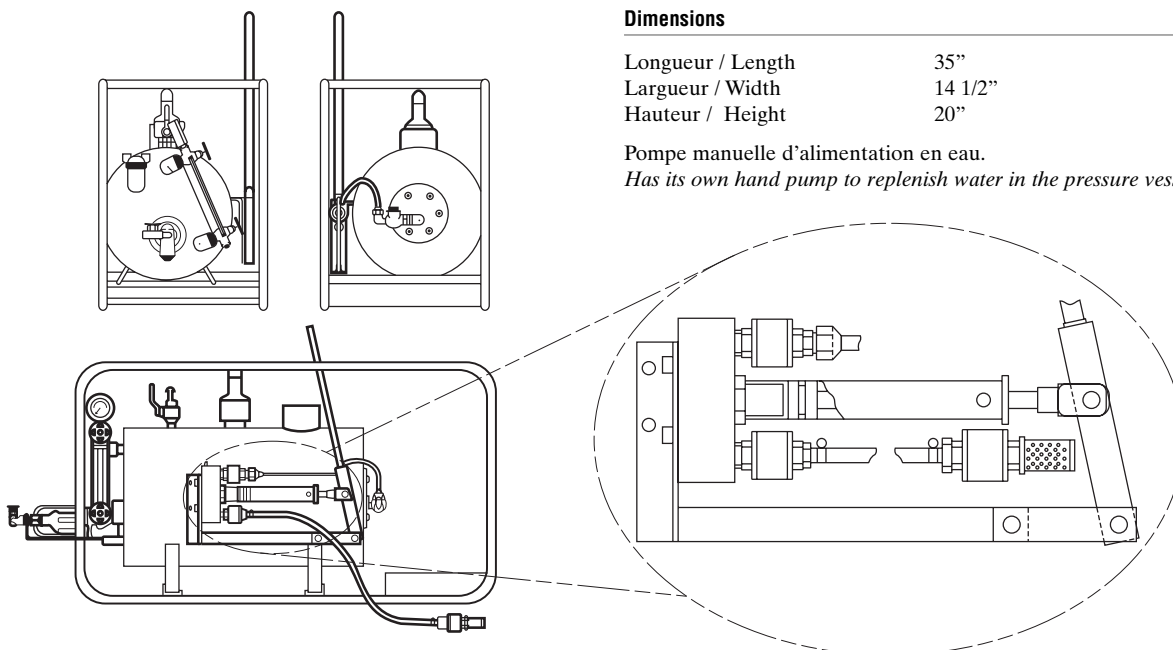


STEAM-JOHNNY ROTAIR

MANHOLE LIFTER & WRENCH

Asybco



MANHOLE LIFTER

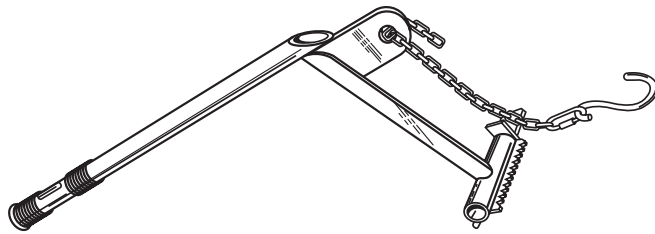


MANHOLE COVER HOOK

31"



HYDRANT WRENCH

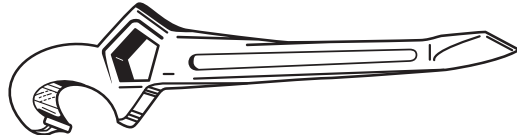

CONDUIT FISHING TOOL

Dévidoir sur pieds, ultra-léger, 16" diamètre, aluminium

Ultralite freestanding 16 in. diameter aluminum dispenser / storage system.

Part No.	Description	Weight per 100 ft
ASY 14810	150 ft. x 3/16 in. rod	1065
ASY 14811	200 ft. x 3/16 in. rod	1133
ASY 14812	250 ft. x 3/16 in. rod	1200



ULTRALITE ROD COILS

Part No.	Description	Weight per 100 ft
ASY 14830	50 ft. x 1/8 in. rod	45
ASY 14831	100 ft. x 1/8 in. rod	90
ASY 14832	150 ft. x 3/16 in. rod	202
ASY 14833	200 ft. x 3/16 in. rod	270
ASY 14834	250 ft. x 3/16 in. rod	337



ASYBCO




Asybco HYDRAULIC ROOT CUTTER

WATER JET ROOT CUTTER - COMMERCIAL DUTY

- Hydraulic power unit
- Internally Ported
- Size: 3 1/4" dia. x 10" long
- Shaft Size: 1" dia.
- Weight: 14 lbs.
- Built-in greasing system, so the exhaust port do not need not be removed.

Kit Includes

- 5 skids (6, 8, 10, 12, 15")
- Tool box.

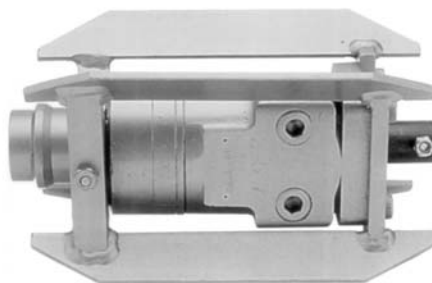

CIRCULAR STYLE ROOT SAWS

- Semi-concave surface with coarse recessed teeth on both sides.
Used in a clockwise rotation with a powered root cutter

Blades available in 6", 8", 10", 12" & 15".

